

Reminder

We appreciate your purchase! Please read the instruction manual before installation and keep it for future reference.

Warning

- To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
- Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
- Please disconnect power before installation or any maintenance of the lamp.
- Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
- Please do not dismantle the lamp without the supplier's authorization.
- Please do not touch the power supply when the lamp is operating.
- If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.

Application

With aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and voltage power driver, the LED Linear High Bay is designed for warehouses with high racks, shopping centers, and other applications.


Technical Parameters

Product Specifications	30W	60W	90W	120W	150W	180W	240W
Input Voltage	AC100~240V / AC100~277V						
Power Frequency	50 / 60Hz						
CRI	Ra70 / Ra80						
Beam Angle	30°x70°, 60°x90°, 120°, 40°x130°						
IP Rating	IP65						
Outlook Dimensions	280x137x102mm	466x137x102mm	718x137x102mm	948x137x102mm	1178x137x102mm	718x275x102mm	948x275x102mm
Luminaire Net Weight	1.9±0.3kg	3.4±0.3kg	4.7±0.3kg	5.7±0.3kg	6.9±0.3kg	8.5±0.3kg	10.3±0.3kg
System Efficacy	125LM/W(CCT=5000K)						
Power Factor	> 0.93						
Lifespan	≥50000Hrs(LM70@35°C)						
Working Temperature	-30 ~ +50°C						
Working Humidity	15% ~ 90%RH						
Storing Temperature	-40 ~ +70°C						

Installation Instructions


A. Wire Suspension Installation

Physical Dimensions

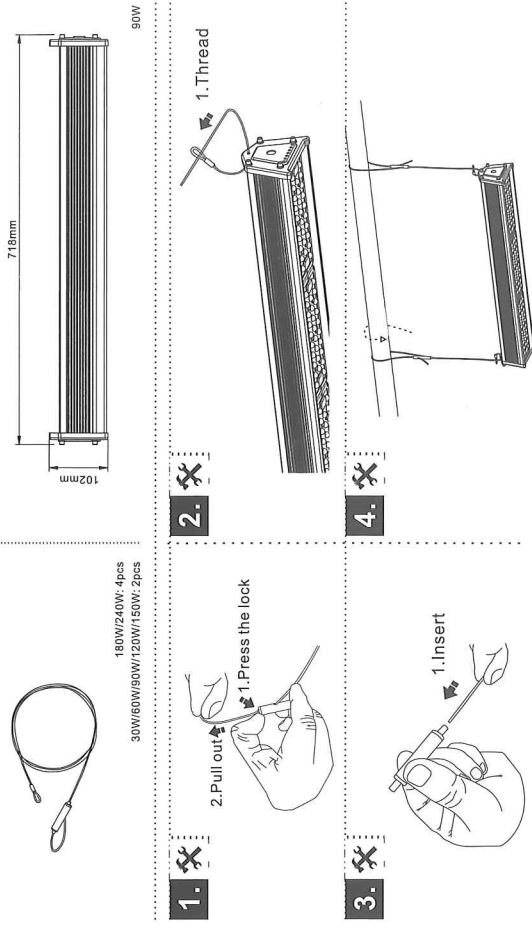

B. Adjustable Surface Mount Installation

Physical Dimensions

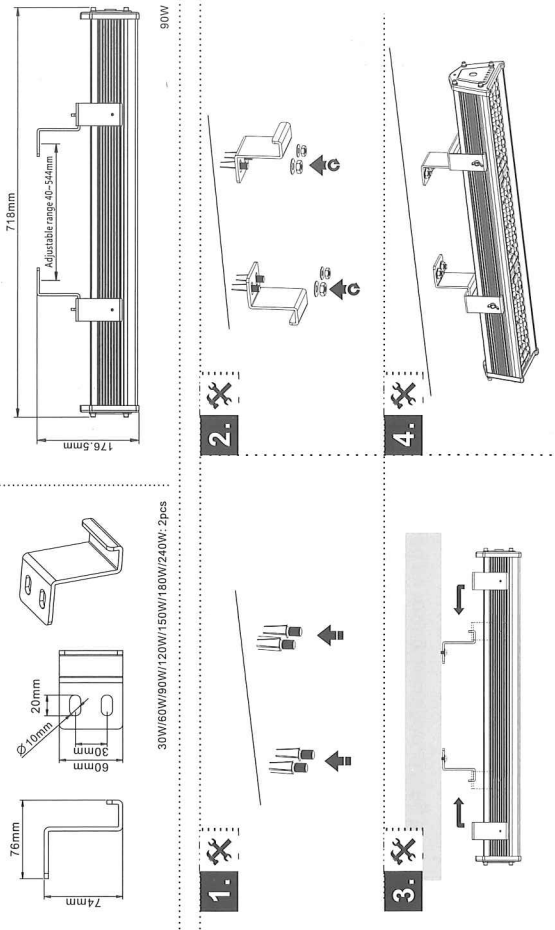

Reminder

We appreciate your purchase!
Please read the instruction manual before installation and keep it for future reference.

Warning

- To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
- Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
- Please disconnect power before installation or any maintenance of the lamp.
- Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
- Please do not dismantle the lamp without the supplier's authorization.
- Please do not touch the power supply when the lamp is operating.
- If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.

Application

With aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and voltage power driver, the LED Linear High Bay is designed for warehouses with high racks, shopping centers, and other applications.


Technical Parameters

Product Specifications	30W	60W	90W	120W	150W	180W	240W
Input Voltage	AC100~240V / AC100~277V						
Power Frequency	50 / 60Hz						
CRI	Ra70 / Ra80						
Beam Angle	30°x70°, 60°x90°, 120°, 40°x130°						
IP Rating	IP65						
Outlook Dimensions	280x137x102mm	466x137x102mm	718x137x102mm	948x137x102mm	1178x137x102mm	718x275x102mm	948x275x102mm
Luminaire Net Weight	1.9±0.3kg	3.4±0.3kg	4.7±0.3kg	5.7±0.3kg	6.9±0.3kg	8.5±0.3kg	10.3±0.3kg
System Efficacy	125LM/W(CCT=5000K)						
Power Factor	> 0.93						
Lifespan	≥50000Hrs(LM70@35°C)						
Working Temperature	-30~+50°C						
Working Humidity	15%~90%RH						
Storing Temperature	-40~+70°C						

Installation Instructions


A. Wire Suspension Installation

Physical Dimensions

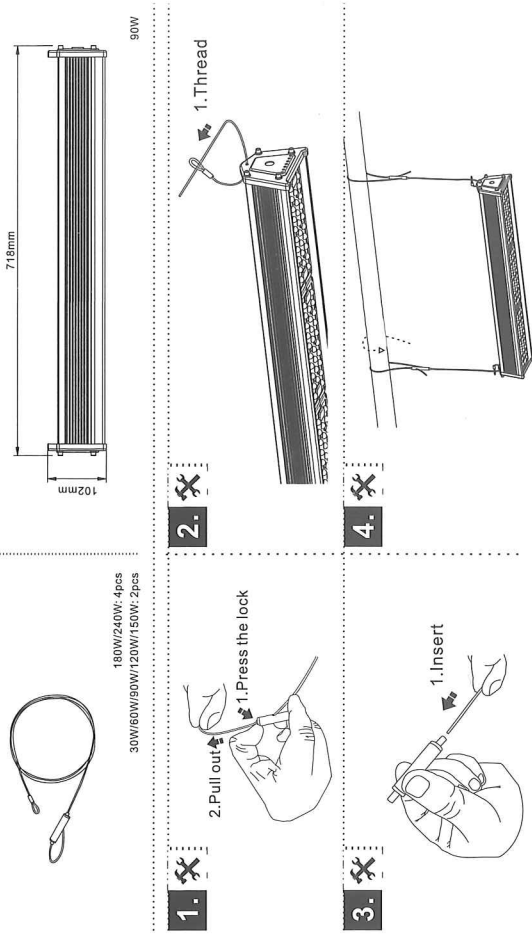

B. Adjustable Surface Mount Installation

Physical Dimensions

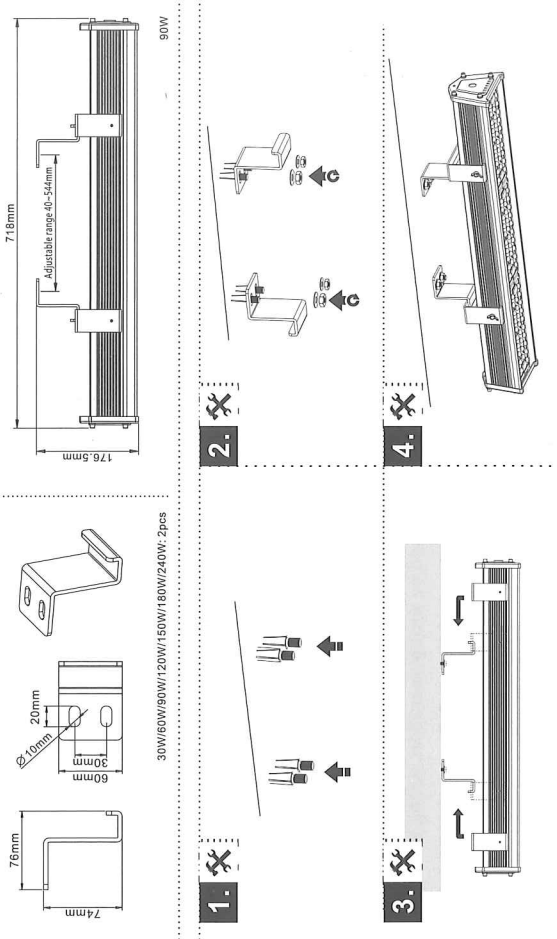

Reminder

We appreciate your purchase!
Please read the instruction manual before installation and keep it for future reference.

Warning

- To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
- Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
- Please disconnect power before installation or any maintenance of the lamp.
- Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
- Please do not dismantle the lamp without the supplier's authorization.
- Please do not touch the power supply when the lamp is operating.
- If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.

Application

With aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and voltage power driver, the LED Linear High Bay is designed for warehouses with high racks, shopping centers, and other applications.


Technical Parameters

Product Specifications	30W	60W	90W	120W	150W	180W	240W
Input Voltage	AC100~240V / AC100~277V						
Power Frequency	50 / 60Hz						
CRI	Ra70 / Ra80						
Beam Angle	30°x70° , 60°x90° , 120° , 40°x130°						
IP Rating	IP65						
Outlook Dimensions	280x137x102mm	466x137x102mm	718x137x102mm	948x137x102mm	1178x137x102mm	1418x137x102mm	1768x137x102mm
Luminaire Net Weight	1.9±0.3kg	3.4±0.3kg	4.7±0.3kg	5.7±0.3kg	6.9±0.3kg	8.5±0.3kg	10.3±0.3kg
System Efficacy	125LM/W(CCT=5000K)						
Power Factor	> 0.93						
Lifespan	≥50000Hrs(LM70@35°C)						
Working Temperature	-30~+50°C						
Working Humidity	15%~90%RH						
Storing Temperature	-40~+70°C						

Installation Instructions

A. Wire Suspension Installation

Physical Dimensions

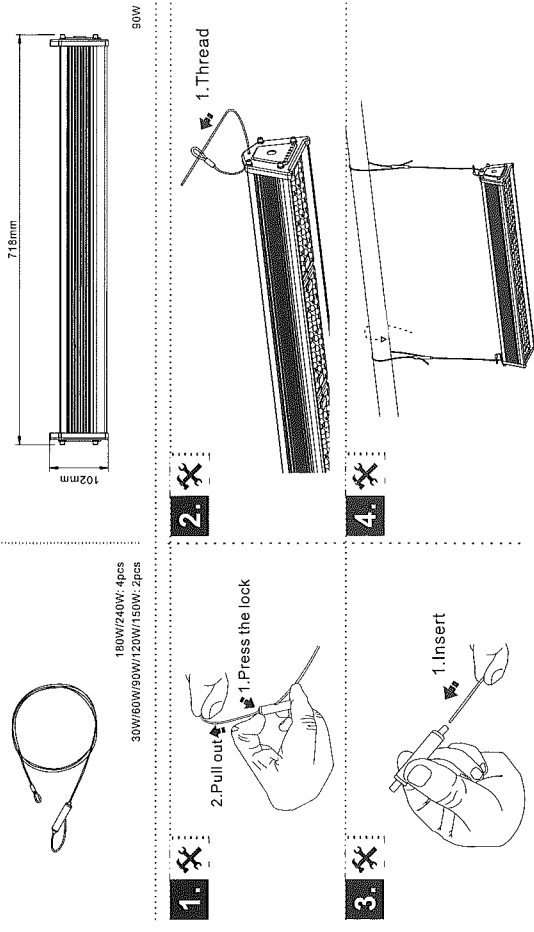

B. Adjustable Surface Mount Installation

Physical Dimensions

